


Slotted Hex Nuts

Low Carbon Steel

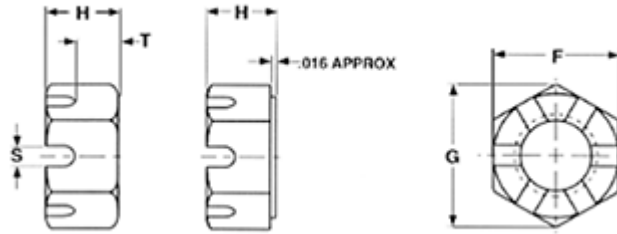

Plain = NZ020----

Zinc = NZ020----Z1

Diameter	F	H	Weight Per C
	Across Flats	Thick	
1/4	7/16	7/32	.8
5/16	1/2	17/64	.9
3/8	9/16	21/64	1.3
7/16	11/16	3/8	2.4
1/2	3/4	7/16	3.2
9/16	7/8	31/64	
5/8	15/16	35/64	6.1
3/4	1-1/8	41/64	10.3
7/8	1-5/16	3/4	17.1
1	1-1/2	55/64	25
1 1/8	1 11/16	31/32	35.3
1 1/4	1 7/8	1 1/16	47.5
1 3/8	2 1/16	1 11/64	64.2
1 1/2	2 1/4	1 9/32	82.9
1 3/4	2 5/8	1 1/2	132
2	3	1 23/32	198
2 1/4	3 3/8	1 59/64	279
2 1/2	3 3/4	2 1/4	383


ANSI / ASME B18.2.2

Slotted Hex Nut

Low Carbon Steel

Plain = NZ020----

Zinc = NZ020----Z1

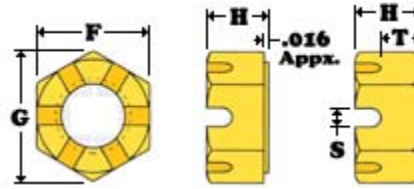

Hex Slotted Nuts - ANSI / ASME B18.2.2								
Diameter	F	G		H	T		S	
	Width Across Flats	Width Across Corners		Thickness	Unslotted Thickness		Slot Width	
	Basic	Max	Min	Basic Max Min	Max	Min	Max	Min
1/4	7/16	.505	.488	7/32	.14	.12	.10	.07
5/16	1/2	.577	.557	17/64	.18	.16	.12	.09
3/8	9/16	.650	.628	21/64	.21	.19	.15	.12
7/16	11/16	.794	.768	3/8	.23	.21	.15	.12
1/2	3/4	.866	.840	7/16	.29	.27	.18	.15
9/16	7/8	1.010	.982	31/64	.31	.29	.18	.15
5/8	15/16	1.083	1.051	35/64	.34	.32	.24	.18
3/4	1-1/8	1.299	1.240	41/64	.40	.38	.24	.18
7/8	1-5/16	1.516	1.447	3/4	.52	.49	.24	.18
1	1-1/2	1.732	1.653	55/64	.59	.56	.30	.24
1-1/8	1-11/16	1.949	1.859	31/32	.64	.61	.33	.24
1-1/4	1-7/8	2.165	2.066	1-1/16	.70	.67	.40	.31
1-1/2	2-1/4	2.598	2.480	1-9/32	.86	.82	.46	.37