


Hex Pipe Plug

3/4 Taper, Dry Seal

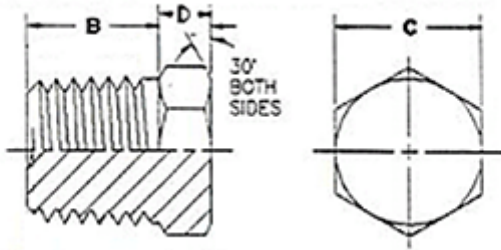

- Carbon Steel = PPH020----
- Stainless Steel = PPH188----
- Stainless Steel = PPH316----
- Nylon = PPHNYL----

Material - ASTM A105 C1010-C1012

Dimensions - ASA B16.14 & SAE J531

Nominal Size	Comp. Number	O	Threads Per Inch	S	K	W	L	
		Nominal O.D.		Hex Socket Size	Key Engagement	Wall Thickness	Overall Length	
							Min	Min
1/16	006	0.315	27	5/32	.140	.062	.324	.300
1/8	012	0.408	27	3/16	.140	.062	.324	.300
1/4	025	0.542	18	1/4	.218	.073	.457	.417
3/8	037	0.681	18	5/16	.250	.084	.520	.480
1/2	050	0.844	14	3/8	.312	.095	.582	.542
3/4	075	1.057	14	9/16	.312	.125	.645	.605
1	100	1.322	11-1/2	5/8	.375	.125	.770	.730
1-1/4	125	1.669	11-1/2	3/4	.437	.156	.832	.792
1-1/2	150	1.908	11-1/2	1	.437	.156	.843	.780
2	200	2.385	11-1/2	1	.437	.156	.906	.844
2-1/2	250	2.872	8	1	.500	.250	1.080	1.050
3	300	3.497	8	1	.500	.250	1.140	1.100
3-1/2	350	3.997	8	1	.500	.250	1.200	1.160
4	400	4.498	8	1	.500	.250	1.270	1.230